


SPECIALTY PRODUCTS

RA50, RA54

Double Deflection Supply Grilles

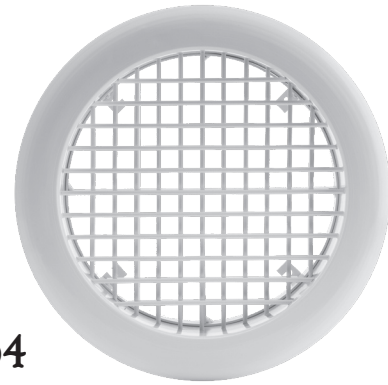

RA54

ALUMINUM

RA50 single deflection round supply grilles are recommended for applications in which one set of individually adjustable blades are required to deflect the supply air in either the horizontal plane or the vertical plane.

RA54 double deflection round supply grilles are recommended for applications in which two sets of individually adjustable blades are required to accommodate any type of room layout or changing job conditions. The blades can be set to allow the air spread to be set left or right and up or down for maximum versatility.

The wide rolled frame is suited for applications in which interior aesthetics clash with standard square and rectangular air outlets. The RA54 can be mounted on walls or on ceilings using the duct mounting ring that is supplied with each unit. The duct mounting ring leaves no visible fasteners from the room side of the grille.

FEATURES



- Aluminum construction
- Extruded 1" blades on 1" centers hold position under typical conditions of pressure and velocity
- Rolled margin that is 1-1/2" wide blends in to walls and ceilings to blend in to many architectural styles
- Duct mounting ring facilitates easy installation and is furnished with screws
- Standard finish is White (WH) or Mill (ML)

ACCESSORIES

- Round butterfly damper (RBD)
- Round opposed blade damper (ROD)
- Round mounted radial blade damper (RRD)
- Equalizing grid (TF)

*Note: Accessories are ordered separately & ship loose for field installation

Available Sizes (in.)
RA50, RA54
6
8
10
12
14
16
18
20