


- Sine wave aluminum fins mechanically bonded to copper tubes
- Aluminum fins are .0045" thick spaced at 10 fins per inch
- Copper tubes are 1/2" thick O.D. and .016" wall thickness
- Coil casing is 20 gauge galvanized steel with slip and drive duct connections (both ends)
- Copper male solder connections
- Leak tested to 300 PSIG / Max working pressure is 240 PSIG

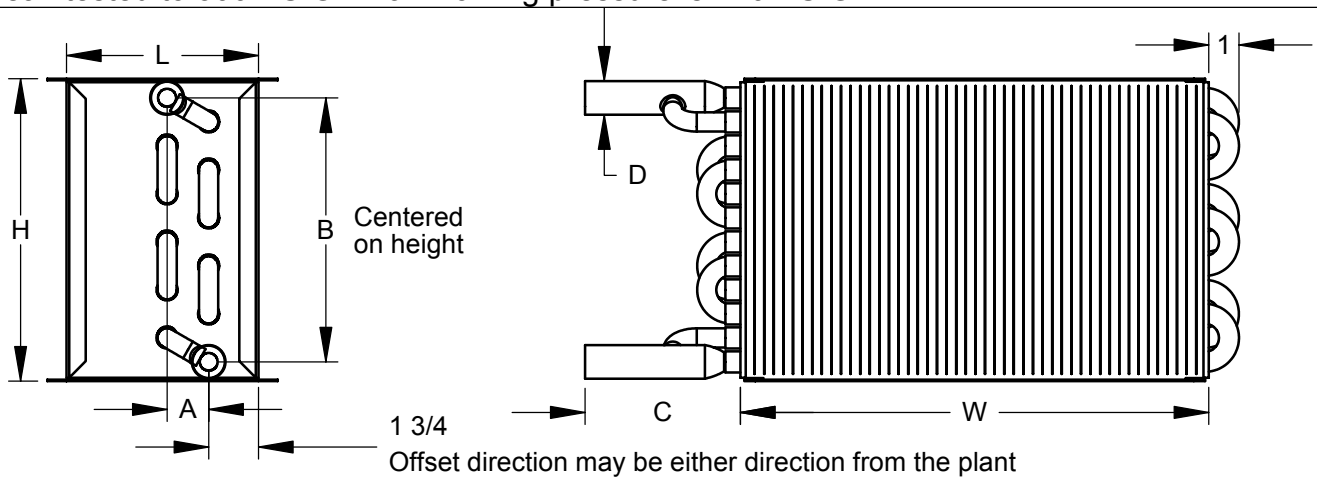

Size	H	W	1 Row					2 Row				
			L	A	B	C	D	L	A	B	C	D
4,5,6	8	12	5	0	6 1/4	3	1/2	5	0	6 7/8	4 1/4	7/8
7,8	10	12	5	0	8 3/4	3	1/2	5	1 1/8	9	4 1/4	7/8
10	12 1/2	14	5	1 1/4	10 7/8	4 1/4	7/8	5	1 1/8	11 1/2	4 1/4	7/8
12	15	16	5	1 1/4	13 3/8	4 1/4	7/8	5	1 1/8	14	4 1/4	7/8
14	17 1/2	20	7 1/2	1 1/4	15 7/8	4 1/4	7/8	7 1/2	1 1/8	16 1/2	4 1/4	7/8
16	18	24	7 1/2	1 1/4	15 7/8	4 1/4	7/8	7 1/2	1 1/8	16 1/2	4 1/4	7/8
24	18	38	5	1 1/4	15 7/8	4 1/4	7/8	5	1 1/8	16 1/2	4 1/4	7/8

Size	H	W	3 Row					4 Row				
			L	A	B	C	D	L	A	B	C	D
4,5,6	8	12	7 1/4	2 1/8	6 7/8	4 1/4	7/8	7 1/4	3 1/4	6 7/8	4 1/4	7/8
7,8	10	12	7 1/4	2 1/8	9	4 1/4	7/8	7 1/4	3 1/4	9	4 1/4	7/8
10	12 1/2	14	7 1/4	2 1/8	10 1/4	4 1/4	7/8	7 1/4	3 1/4	10 1/4	4 1/4	7/8
12	15	16	7 1/4	2 1/8	14	4 1/4	7/8	7 1/4	3 1/4	14	4 1/4	7/8
14	17 1/2	20	9 3/4	2 1/8	14	4 1/4	7/8	9 3/4	3 1/4	14	4 1/4	7/8
16	18	24	9 3/4	2 1/8	14	4 1/4	7/8	9 3/4	3 1/4	14	4 1/4	7/8
24	18	38	7 1/4	2 1/8	14	4 1/4	7/8	7 1/4	3 1/4	14	4 1/4	7/8

Options

Vent and Drain

Dimensions in inches

Job: _____	Submitted By: _____	Hot Water Coils SDV
Location: _____		
Architect: _____		
Engineer: _____		
Contractor: _____	SD-7007	Rev: A (04/05)