


Tuttle & Bailey® SUBMITTAL DRAWING

- T125 H – Horizontal face bars spaced on 1/2" centers
- T125 V – Vertical face bars spaced on 1/2" centers
- Support mullions spaced on 8" centers
- Face bars are individually adjustable (factory set at 0° deflection)
- Optional damper (SOBD) is screwdriver adjustable through face
- Steel construction (frame – 18 gauge, blades – 14 gauge)
- Standard finish is white

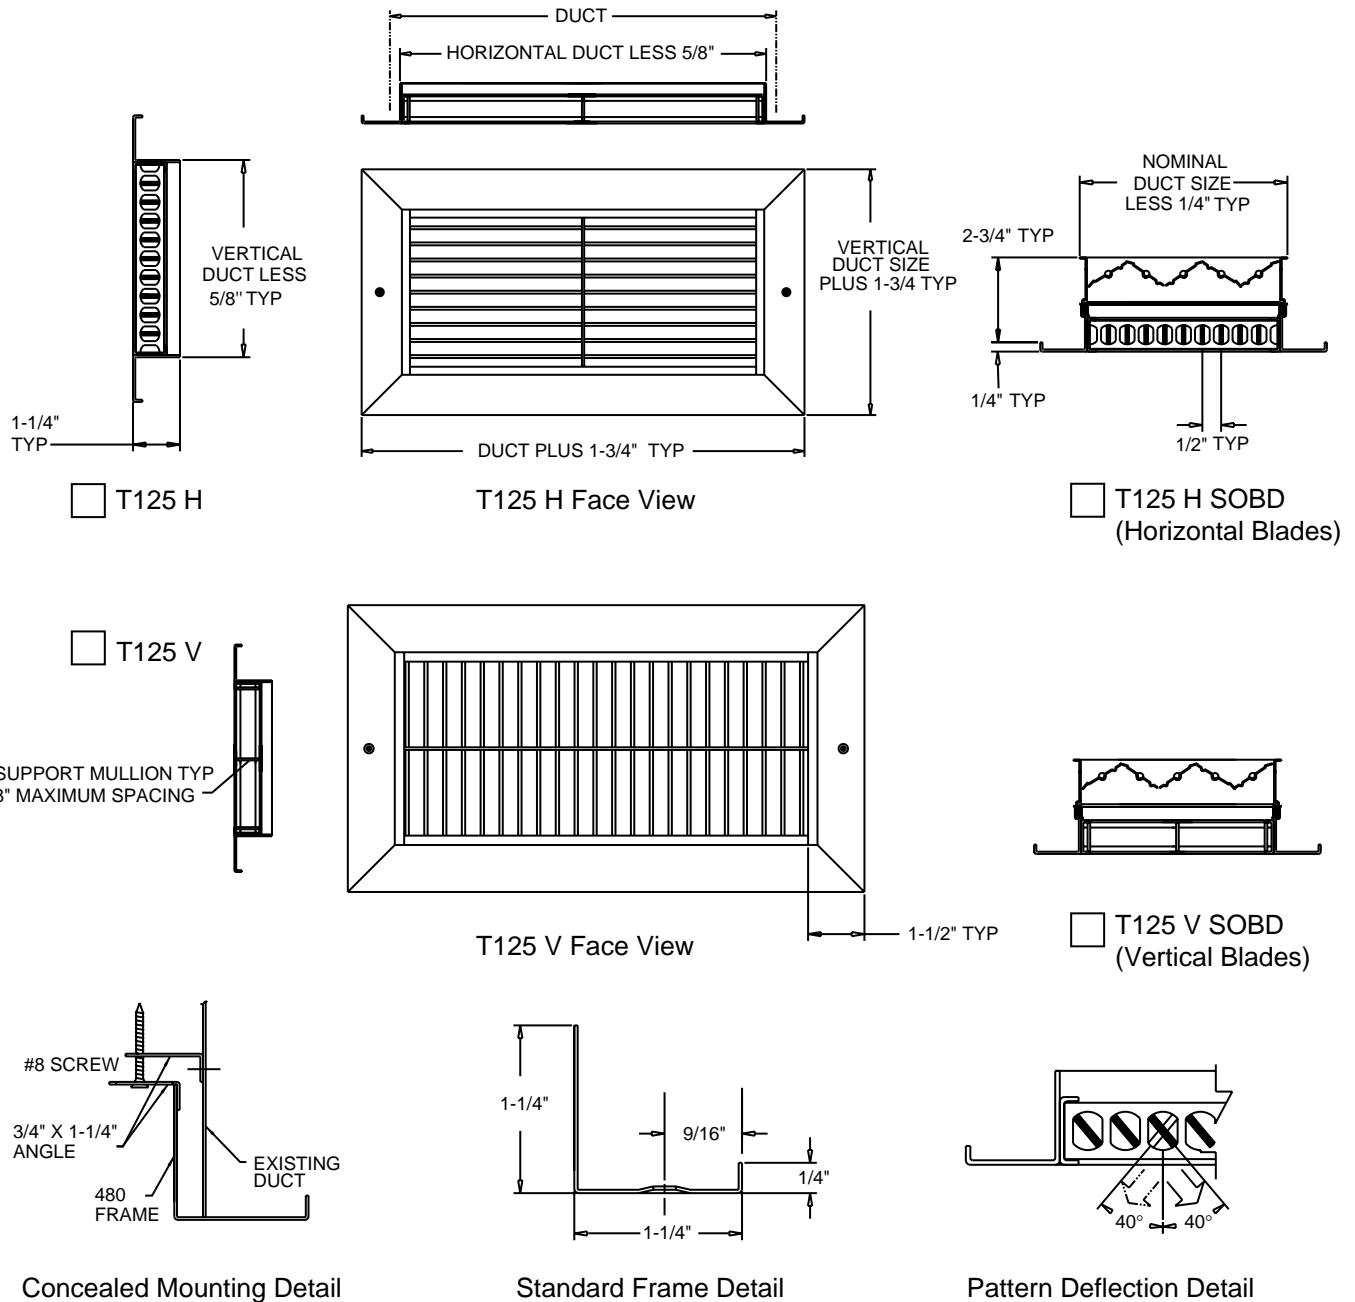

Dimensions are in inches. Product information subject to change without notice.

JOB NAME: _____
 LOCATION: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____

SUBMITTED BY: _____

DATE: 9-1-00 SD-1769

T125 Heavy Duty
 Single Deflection Supply
 Adjustable Bars