
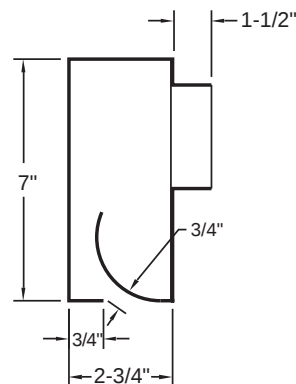


- Supply slots with contoured blades (non-adjustable) create high induction
- Single slot configuration with 3/4" slot width
- Available lengths: 24", 36", 48", 60"
- Standard finish is black exposed surfaces and pattern blades
- Steel construction

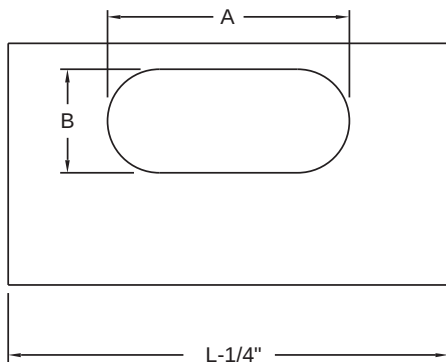


Available Inlet Sizes	A	B
6"	7-9/16"	3"
8"	10-1/16"	4"
10"	13-1/4"	4"

Available lengths (L):


24", 36", 48", 60"

24" length available in 6" and 8" inlets only.

The HISD is designed for standard Lay-in T-bar ceiling systems. The optional PF plaster frame can be used to mount the diffuser in sheet rock or plaster ceilings (PF is mounted by others). Height is 1-1/2".



Optional Plaster Frame (PF)

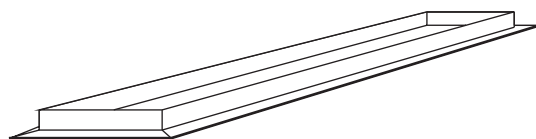

Dimensions are in inches. Product information subject to change without notice.

PROJECT:

ARCHITECT:

ENGINEER:

CONTRACTOR:

LOCATION:

SUBMITTED BY:

DATE: 5-28-02

SD-1857

HISD

Plenum Slot Diffuser
Supply Only