
## Tuttle & Bailey.


## **SUBMITTAL DRAWING**

- · Model SVPS-NR 2-slot requires a narrow center T-bar (provided by others) to match ceiling system
- · Single vane gasket tipped blade, adjustable
- · Available in 1 or 2 slots, and 1" slot width
- Available lengths: 24", 48" (24" length has 1 blade per slot, 48" length has 2)
- Internal insulation available (end caps are not insulated)
- · Standard finish is black exposed surfaces, black pattern controller
- Steel construction

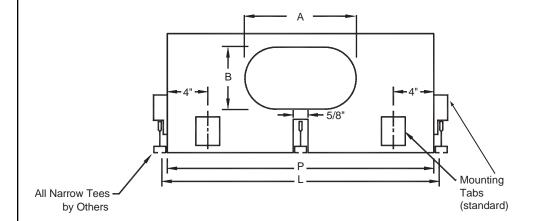


Available Inlet Sizes	Α	В
5" Round	4-7/8"	ı
6" Oval	6-1/4"	5-1/4"
8" Oval	9-3/8"	5-1/4"
10" Oval	12-1/2"	5-1/4"
12" Oval	15-5/8"	5-1/4"

Nominal Length	Overall Length (L)	Plenum Length (P)	
24"	23-3/4"	23-3/8"	
48"	47-3/4"	47-3/8"	

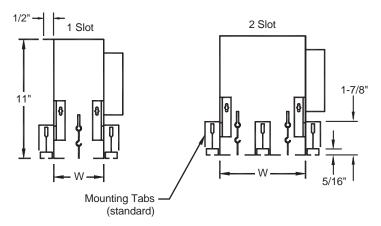

Slot	Diffuser Width (W)		
Width	1 Slot	2 Slot	
1"	2"	4-1/2"	



Narrow T-bar Detail
(All narrow Tees provided by others)

## **Accessories:**

Earthquake tabs (not shown). Standard is 2 tabs per diffuser.

Inlet damper (4" deep), damper is shipped loose for field installation.

**Notes:** Cross notch (CN) is provided on all 48" diffusers. Center channel is provided on all 2 slot diffusers.

Dimensions are in inches. Product information subject to change without notice.

PROJECT:	SUBMITTED BY:	DATE: 5-28-02	SD-1851	
ARCHITECT:	_	SVPS-NR		
ENGINEER:	_	Plenum Slot D	Plenum Slot Diffuser	
CONTRACTOR:	_	For Narrow Te	For Narrow Tee	
LOCATION:	_	Ceiling Systen	Ceiling Systems	