



Submittal Drawing

- Heavy extruded aluminum blades in a 20 gauge steel margin
- · Individually adjustable, aerodynamically shaped blades on 3" spaced centers
- · Available with both horizontal blades and vertical blades
- Available in sizes ranging from 6" x 4" to 48" x 48" in 1" increments; larger sizes will ship in multiple sections
 with assembly hardware for field assembly
- Standard finish is white (WH)

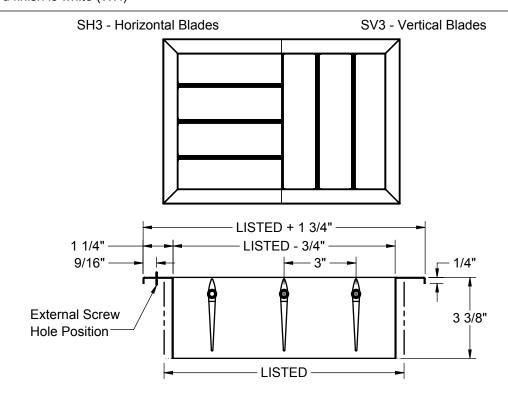



Mounting Style

A - External Screw Holes

C - Concealed Screw Holes with Brackets

N - No Screw Holes

Finish

WH - White

AP - Aluminum Paint

OW - Off-White

FB - Flat Black

MP - Match Paint

Accessories

SOBD - Steel Opposed Blade Damper

S - Slot Operated

L - Lever Operated

AOBD - Aluminum Opposed Blade Damper

S - Slot Operated

L - Lever Operated

ST - Earthquake Tabs

SM - Insect Screen, 1/16" Square Mesh

LM - Debris Screen, 1/4" Square Mesh

45 - Steel Plaster Frame

A45 - Aluminum Plaster Frame

Dimensions in inches

Job: Location:	Tag:		AIGS-3
Architect:	Submitted By:		Industrial Grille/Register Single Deflection
Engineer:			3" Blade Spacing
Contractor:	SD - 2277	Rev: A (08/17)	