



- Steel construction
- 360 degree discharge pattern
- Two position adjustable core: Position 1 where maximum capacity is obtained, Position 2 where induction is increased
- Spring lock allows easy removal and replacement of inner core

- Optional round dampers shipped loose for field installation
- Safety cable is standard on neck sizes 12" thru 36"
- Standard finish is white (WH)

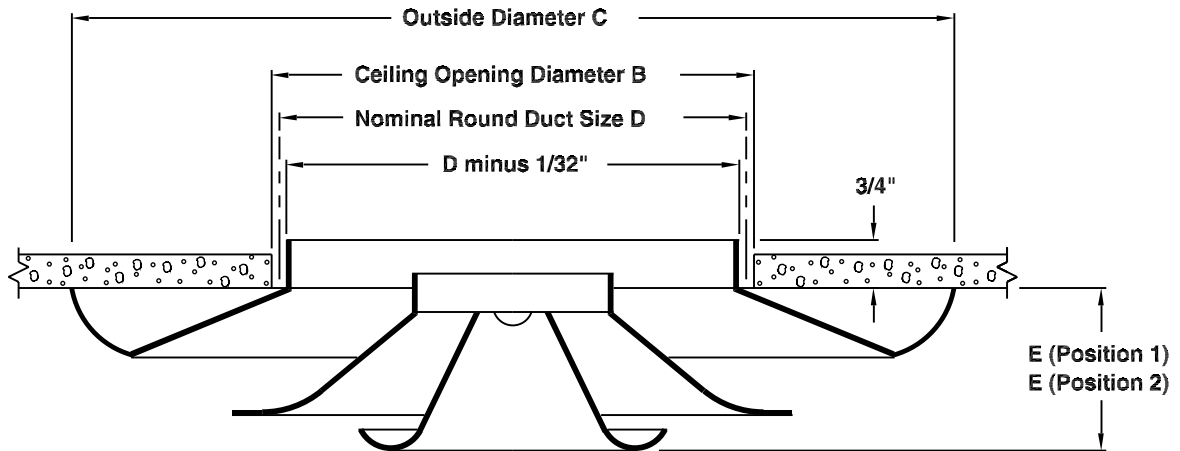

Nominal Round Duct Size D	B	C	E (Pos. 1)	E (Pos. 2)
06	6-1/2	11-1/8	1-3/4	1-1/8
08	8-1/2	14-3/4	2-1/8	1-1/2
10	10-1/2	18-1/4	2-7/8	2-1/8
12	12-1/2	22	3-1/8	2-3/8
14	14-1/2	26	3-3/8	2-5/8
16	16-1/2	29	4	3-1/4
18	18-1/2	32-1/2	4-3/4	3-7/8
20	20-1/2	36	5-7/8	4-7/8
24	24-1/2	43-1/4	7-3/4	6-5/8
30	30-1/2	53-3/4	8-1/8	6-5/8
36	36-1/2	64-1/2	10-1/8	8-3/8

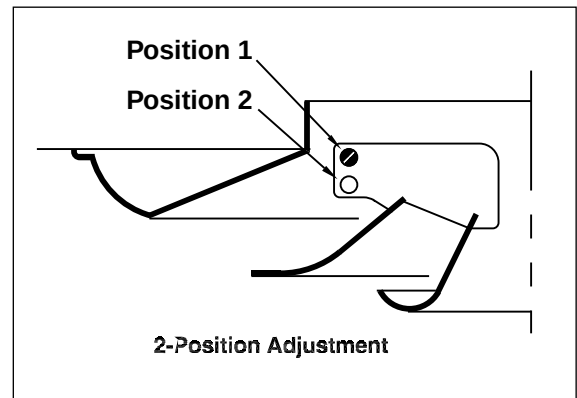

Dimensions are in inches, product information subject to change without notice.

PROJECT: _____
 ARCHITECT: _____
 ENGINEER: _____
 CONTRACTOR: _____
 LOCATION: _____

SUBMITTED BY: _____

DATE: 10-8-01

SD-1840

P3 3-Cone
 Round Diffuser
 Steel