



- Steel construction
- 360 degree discharge pattern
- Three types of core adjustments: three position fixed, sliding, and rotating
- Spring lock allows easy removal and replacement of inner core
- Safety cable is standard on neck sizes 12" thru 36"
- Optional round dampers shipped loose for field installation
- Standard finish is white (WH)

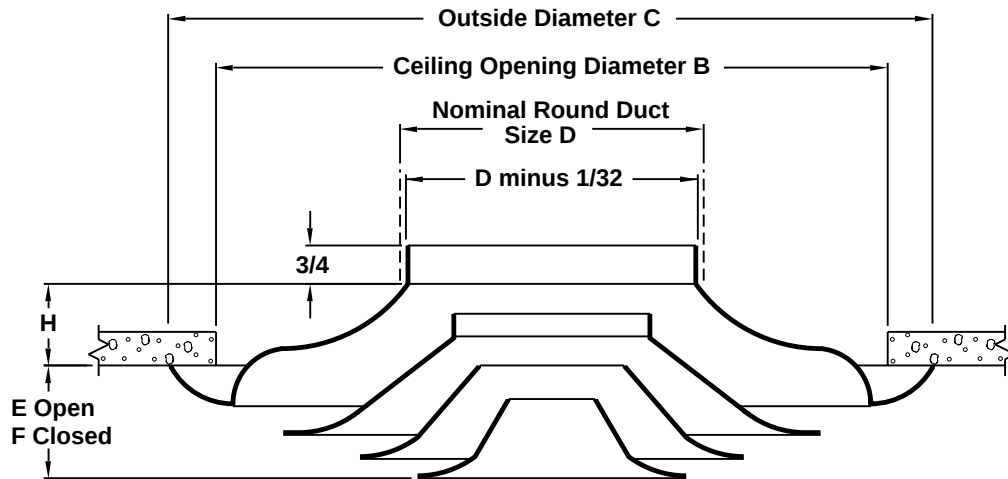


Nominal Round Duct Size D	B	C	E	F	H	P*
06	12	13-1/2	1-7/16	11/16	1-5/8	-
08	16	18	1-13/16	7/8	2-1/8	-
10	20	22-1/2	2-1/4	1-1/8	2-5/8	-
12	24	27	2-11/16	1-1/4	3-1/4	-
14	28	31-1/2	3-1/8	1-3/16	3-3/4	2-1/2
16	32	36	3-5/16	1-5/16	4-1/4	2-5/8
18	36	40-1/2	3-3/4	1-1/2	4-7/8	2-3/4
20	40	45	4-1/8	1-5/8	5-3/8	3-1/2
24	48	54	4-7/8	1-7/8	6-1/2	3-5/8
30	60	67-1/2	5-9/16	1-7/8	8	4-1/8
36	60	67-1/2	5-9/16	1-7/8	8	4-3/8

*When using **Type 3** adjustment method, the adjusting shaft projects above the neck of the diffuser on sizes 14"-36". See dimension P for maximum amount of projection.


Adjustment Types

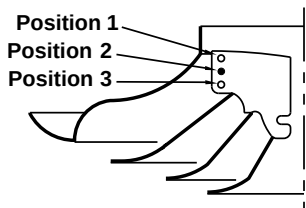

Type 1: 3-Position
(available in neck sizes 6"-36")

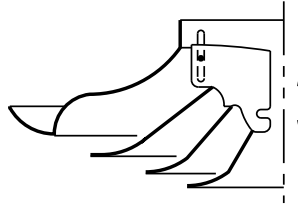

Type 2: Sliding
(available in neck sizes 6"-12")

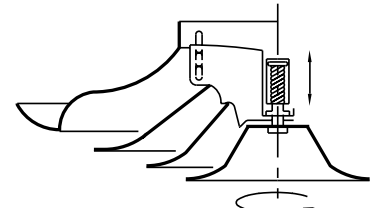

Type 3: Rotating
(available in neck sizes 6"-36")

Dimensions are in inches, product information subject to change without notice.

PROJECT:

ARCHITECT:

ENGINEER:

CONTRACTOR:

LOCATION:

SUBMITTED BY:

DATE: 10-8-01

SD-1842

VJR 4-Cone
Round Diffuser
Steel