



- Steel construction
- 360 degree discharge pattern
- Three types of core adjustments: three position fixed, sliding, and rotating
- Spring lock allows easy removal and replacement of inner core
- Outer cone reduces ceiling smudging
- Safety cable is standard on neck sizes 12" thru 24"
- Optional round dampers shipped loose for field installation
- Standard finish is white (WH)

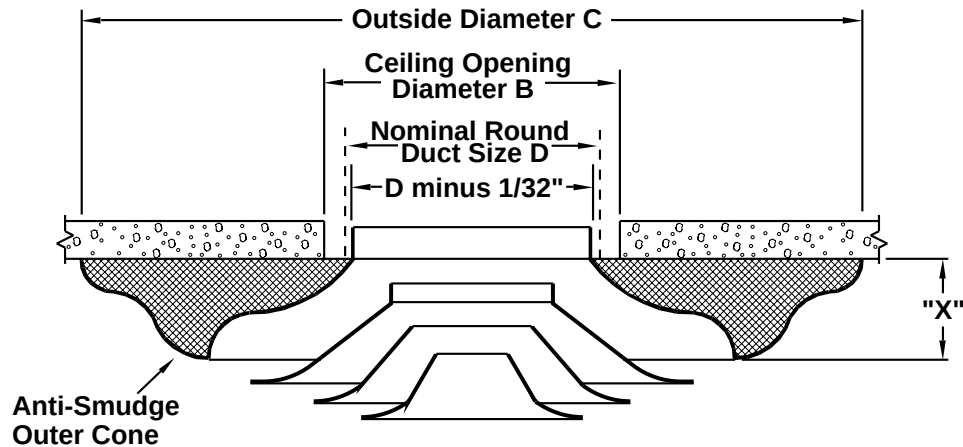

Nominal Round Duct Size D	B	C	X	P*
06	7	17-3/4	2	-
08	9	23-1/4	2-5/8	-
10	11	29	3-1/4	-
12	13	34-7/8	3-7/8	-
14	15	40-5/8	4-1/2	2-1/2
16	17	46-3/4	5-1/4	2-5/8
18	19	51-3/8	5-7/8	2-3/4
20	21	56-1/4	6-1/2	3-1/2
24	25	67	7-7/8	3-5/8
30	N/A	N/A	N/A	N/A
36	N/A	N/A	N/A	N/A

*When using **Type 3** adjustment method, the adjusting shaft projects above the neck of the diffuser on sizes 14"-36". See dimension P for maximum amount of projection.

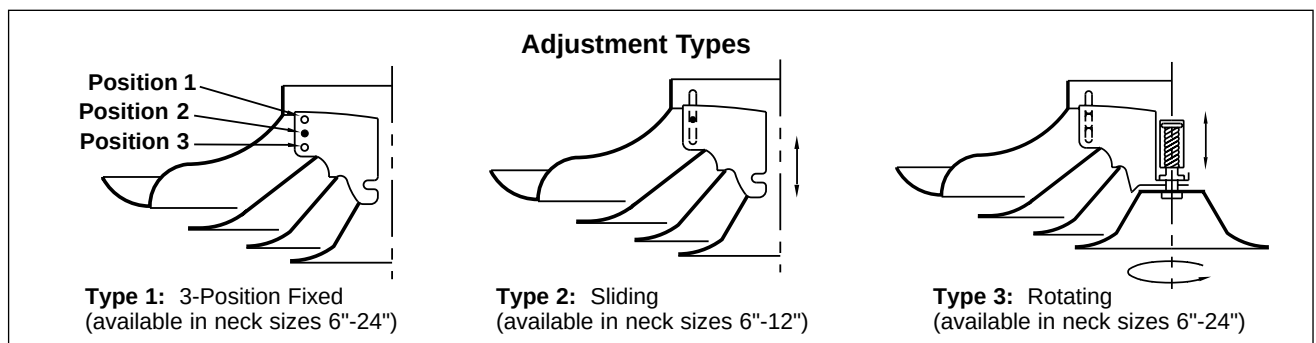

Dimensions are in inches, product information subject to change without notice.

PROJECT:	SUBMITTED BY:	DATE: 10-8-01	SD-1844
ARCHITECT:		VJS 4-Cone Round Diffuser w/ Anti-Smudge Cone Steel	
ENGINEER:			
CONTRACTOR:			
LOCATION:			